



STUDIOMASTER M300

HighEnd audio system equipped with powerful, built-in amplifiers, DAB+, FM tuner, an OLED glass front display and multiple connection options and a wide range of audio sources. Playback options include Wi-Fi, LAN, Bluetooth and AirPlay 2. Music streaming with iRadio, Spotify, Tidal, Deezer and qobuz. HDMI and other ports connect with TVs, audio players or headphones. The unique Revox Multiuser concept enables individual listening options for several users in one room. The Multiroom solution builds on the modular approach to deliver the same versatility across different rooms.

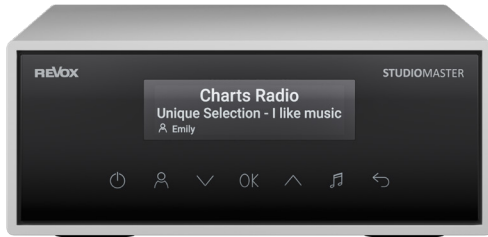

Front view M300

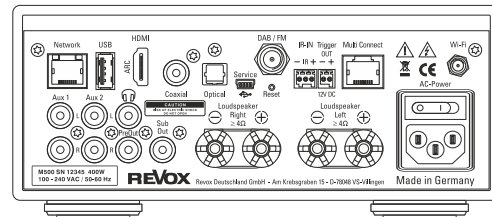

Rear view M300

TECHNICAL DATA

| STUDIOMASTER M300 | | | | |
|---------------------------|---|--------------|---------------------------|---|
| Order Number | black | 1.565.003.20 | Apple interface | AirPlay 2 |
| | silver | 1.565.003.00 | Bluetooth | BT5.0 with apt-X, apt-X HD, AAC (+), MP3, SBC |
| | white | 1.565.003.10 | Multi Connect | 1x RJ45 for other Revox Multi Connect devices |
| Colours housing | black, silver, white | | Audio formats | AAC, ALAC, AIFF, FLAC, MP3 (cbr + vbr), OGGVorbis, WAV, MWA |
| Dimensions H x W x D (mm) | 87 x 200 x 342 | | Playlist formats | ASX, M3U, M3U8, PLS, WPL |
| Weight (kg) | 4.4 | | Supported media protocols | Audio network paths with SMB 2 protocol or higher |
| Power | 2x 95 W (1 kHz/ 2% THD/ 3 Ω) | | Music services | Spotify, TIDAL, deezer |
| | 2x 80 W (1 kHz/ 2% THD/ 4 Ω) | | Radio | FM, DAB+, internet radio |
| | 2x 40 W (1 kHz/ 2% THD/ 8 Ω) | | Display | Real glass front with integrated infrared (IR) receiver and OLED display, luminous white, 256x64 pixels, with 7 touch sensors |
| Power consumption | 0 W off position of mains switch < 8 W Standby < 13 W normal operation with no signal | | | |
| Temperature range | +10 ... 40 °C | | | |
| Damping factor | 1200 at 8 Ω | | | |
| Harmonic distortion | 0.005 % at 25 W and 4 Ω | | | |
| Analogue inputs | 700 mV / 39 kΩ (for full scale) | | | |
| Digital inputs | 1x optical, 1x coaxial, 16, 20, 24 bit PCM, SPDIF up to 192 kHz | | | |
| USB | USB-A, 5-Volt, max. 500 mA | | | |
| Subwoofer out | 1 mono | | | |
| Pre Out | 1 stereo analogue | | | |

OPERATION

| | |
|--|--|
| Display on the device | |
| Revox Multiuser app | |
| STUDIOCONTROL C200 | |
| C18 Multiuser wall control | |
| C100 Multiuser remote control | |
| TV remote control for HDMI ARC connections | |

ACCESSORIES

| | incl. |
|-----------------|-------|
| WLAN antenna | ✓ |
| Antenna adapter | ✓ |
| Power cord | ✓ |
| Patch cable | ✓ |